




Cat's Eye[®]
TPMS



PRODUCT ORDERING GUIDE

HOW TO SELECT YOUR CAT'S EYE[®]

THE CAT'S EYE PART NUMBERING SYSTEM

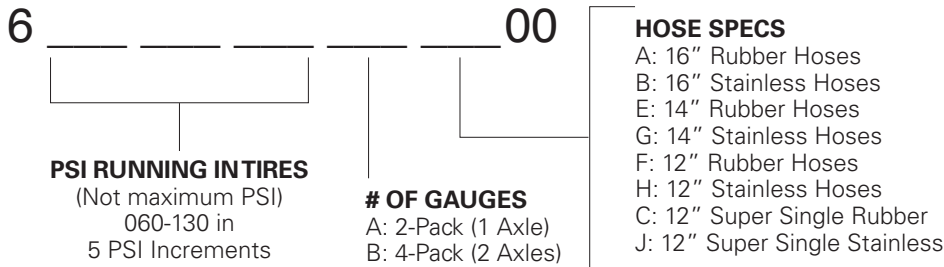

EXAMPLE

6075BG00

- Your target tire pressure is 75 PSI
- You want a 4-Pack of gauges
- You want 14" Stainless Hoses

WHAT HOSE LENGTH DO YOU NEED?

| | |
|--|--|
| 17.5 Tires normally use a 12" HOSE | The hose lengths shown are appropriate for most applications. If you have any questions about which hose is the best choice for your specific vehicle and tire/rim configurations, contact your local dealer, or call Link at 800.222.6283 |
| 19.5 Tires normally use a 14" HOSE | |
| 22.5 & 24.5 Tires normally use a 16" HOSE | |

FOR DUAL TIRES

SEE REVERSE FOR SINGLE TIRES»

| HOSE | 2-PACKS STAINLESS DUALS | | | 4-PACKS STAINLESS DUALS | | | 2-PACKS RUBBER DUALS | | | 4-PACKS RUBBER DUALS | | |
|--------|-------------------------|----------|----------|-------------------------|----------|----------|----------------------|----------|----------|----------------------|----------|----------|
| | 12" | 14" | 16" | 12" | 14" | 16" | 12" | 14" | 16" | 12" | 14" | 16" |
| 60psi | 6060AH00 | 6060AG00 | 6060AB00 | 6060BH00 | 6060BG00 | 6060BB00 | 6060AF00 | 6060AE00 | 6060AA00 | 6060BF00 | 6060BE00 | 6060BA00 |
| 65psi | 6065AH00 | 6065AG00 | 6065AB00 | 6065BH00 | 6065BG00 | 6065BB00 | 6065AF00 | 6065AE00 | 6065AA00 | 6065BF00 | 6065BE00 | 6065BA00 |
| 70psi | 6070AH00 | 6070AG00 | 6070AB00 | 6070BH00 | 6070BG00 | 6070BB00 | 6070AF00 | 6070AE00 | 6070AA00 | 6070BF00 | 6070BE00 | 6070BA00 |
| 75psi | 6075AH00 | 6075AG00 | 6075AB00 | 6075BH00 | 6075BG00 | 6075BB00 | 6075AF00 | 6075AE00 | 6075AA00 | 6075BF00 | 6075BE00 | 6075BA00 |
| 80psi | 6080AH00 | 6080AG00 | 6080AB00 | 6080BH00 | 6080BG00 | 6080BB00 | 6080AF00 | 6080AE00 | 6080AA00 | 6080BF00 | 6080BE00 | 6080BA00 |
| 85psi | 6085AH00 | 6085AG00 | 6085AB00 | 6085BH00 | 6085BG00 | 6085BB00 | 6085AF00 | 6085AE00 | 6085AA00 | 6085BF00 | 6085BE00 | 6085BA00 |
| 90psi | 6090AH00 | 6090AG00 | 6090AB00 | 6090BH00 | 6090BG00 | 6090BB00 | 6090AF00 | 6090AE00 | 6090AA00 | 6090BF00 | 6090BE00 | 6090BA00 |
| 95psi | 6095AH00 | 6095AG00 | 6095AB00 | 6095BH00 | 6095BG00 | 6095BB00 | 6095AF00 | 6095AE00 | 6095AA00 | 6095BF00 | 6095BE00 | 6095BA00 |
| 100psi | 6100AH00 | 6100AG00 | 6100AB00 | 6100BH00 | 6100BG00 | 6100BB00 | 6100AF00 | 6100AE00 | 6100AA00 | 6100BF00 | 6100BE00 | 6100BA00 |
| 105psi | 6105AH00 | 6105AG00 | 6105AB00 | 6105BH00 | 6105BG00 | 6105BB00 | 6105AF00 | 6105AE00 | 6105AA00 | 6105BF00 | 6105BE00 | 6105BA00 |
| 110psi | 6110AH00 | 6110AG00 | 6110AB00 | 6110BH00 | 6110BG00 | 6110BB00 | 6110AF00 | 6110AE00 | 6110AA00 | 6110BF00 | 6110BE00 | 6110BA00 |
| 115psi | 6115AH00 | 6115AG00 | 6115AB00 | 6115BH00 | 6115BG00 | 6115BB00 | 6115AF00 | 6115AE00 | 6115AA00 | 6115BF00 | 6115BE00 | 6115BA00 |
| 120psi | 6120AH00 | 6120AG00 | 6120AB00 | 6120BH00 | 6120BG00 | 6120BB00 | 6120AF00 | 6120AE00 | 6120AA00 | 6120BF00 | 6120BE00 | 6120BA00 |
| 125psi | 6125AH00 | 6125AG00 | 6125AB00 | 6125BH00 | 6125BG00 | 6125BB00 | 6125AF00 | 6125AE00 | 6125AA00 | 6125BF00 | 6125BE00 | 6125BA00 |
| 130psi | -- | 6130AG00 | 6130AB00 | 6130BH00 | 6130BG00 | 6130BB00 | -- | -- | 6130AA00 | 6130BF00 | 6130BE00 | 6130BA00 |

* Do not install Cat's Eye on Steer Axles

PRODUCT ORDERING GUIDE

FOR SUPER SINGLES

| | 2-PACK RUBBER | 2-PACK STAINLESS | 4-PACK RUBBER | 4-PACK STAINLESS |
|-------------|---------------|------------------|---------------|------------------|
| HOSE | 12" | 12" | 12" | 12" |
| 60psi | 6060AC00 | 6060AJ00 | 6060BC00 | 6060BJ00 |
| 65psi | 6065AC00 | 6065AJ00 | 6065BC00 | 6065BJ00 |
| 70psi | 6070AC00 | 6070AJ00 | 6070BC00 | 6070BJ00 |
| 75psi | 6075AC00 | 6075AJ00 | 6075BC00 | 6075BJ00 |
| 80psi | 6080AC00 | 6080AJ00 | 6080BC00 | 6080BJ00 |
| 85psi | 6085AC00 | 6085AJ00 | 6085BC00 | 6085BJ00 |
| 90psi | 6090AC00 | 6090AJ00 | 6090BC00 | 6090BJ00 |
| 95psi | 6095AC00 | 6095AJ00 | 6095BC00 | 6095BJ00 |
| 100psi | 6100AC00 | 6100AJ00 | 6100BC00 | 6100BJ00 |
| 105psi | 6105AC00 | 6105AJ00 | 6105BC00 | 6105BJ00 |
| 110psi | 6110AC00 | 6110AJ00 | 6110BC00 | 6110BJ00 |
| 115psi | 6115AC00 | 6115AJ00 | 6115BC00 | 6115BJ00 |
| 120psi | 6120AC00 | 6120AJ00 | 6120BC00 | 6120BJ00 |
| 125psi | 6125AC00 | 6125AJ00 | 6125BC00 | 6125BJ00 |
| 130psi | -- | 6130AJ00 | 6130BC00 | 6130BJ00 |

* Do not install Cat's Eye on Steer Axles

PACKAGE CONTENTS

(FOR DUALS AND SUPER SINGLES)

2 Unit Retail Bubble Pack

2 Cat's Eye® units with reinforced rubber/stainless steel hoses, mounting brackets, installation instructions & warranty card.

4 Unit Box

4 Cat's Eye® units with reinforced rubber/stainless steel hoses, mounting brackets, "How To Read Cat's Eye" decal, installation instructions & warranty card.

Terms

- 48 units-prepaid freight (24-2 pack or 12-4 pack) (continental U.S. only)
- 2 unit / 4 unit quantities can be mixed
- Call factory for volume discounts.

Warranty

Each Cat's Eye® is warranted for a full year from time of purchase. A completed warranty card or proof of purchase is required.

REPLACEMENT PARTS

| ITEM | PART NUMBER | ITEM | PART NUMBER |
|---|-------------|---|-------------|
| Universal Wheel Bracket | 6000-3009 | 14" Stainless Steel Hose with Straight Hose End | 6000-5078 |
| Universal Hub Bracket | 6000-3010 | 14" Stainless Steel Hose with 180° Hose End | 6000-5878 |
| Hose Protector - 6" length | 6000-4312 | 12" Rubber Hose with Straight Hose End | 6000-5024 |
| 16" Rubber Hose with Straight Hose End | 6000-5032 | 12" Rubber Hose with 180° Hose End | 6000-5824 |
| 16" Rubber Hose with 180° Hose End | 6000-5832 | 12" Stainless Steel Hose with Straight Hose End | 6000-5074 |
| 16" Stainless Steel Hose with Straight Hose End | 6000-5082 | 12" Stainless Steel Hose with 180° Hose End | 6000-5874 |
| 16" Stainless Steel Hose with 180° Hose End | 6000-5882 | Air Inlet Fitting | 6000-2019 |
| 14" Rubber Hose with Straight Hose End | 6000-5028 | Replacement Seal Pack (24 seals) | 6000-4222 |
| 14" Rubber Hose with 180° Hose End | 6000-5828 | | |

