


GM 4500/5500

Chassis Cab & Cutaway

(8M000070)

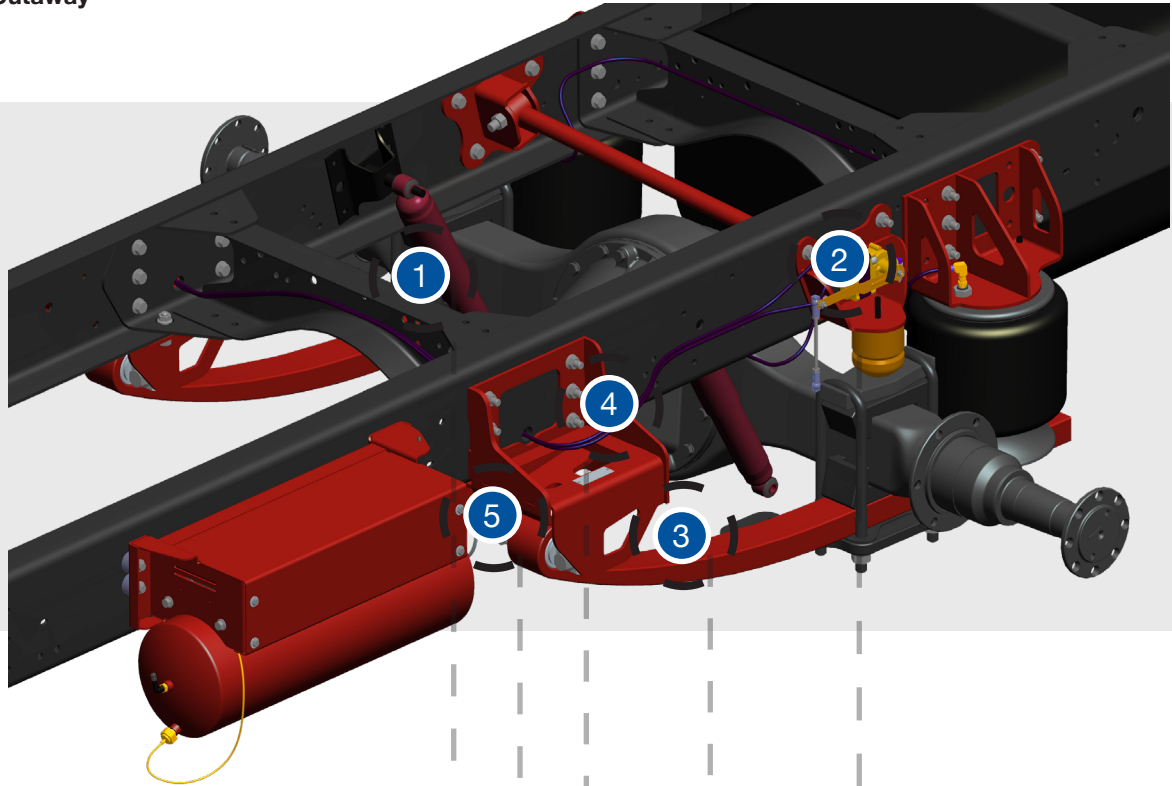

1 Shock Absorbers

2 Height Control System

3 Custom Spring Arm

4 Existing Frame Holes


5 Adjustable Shims

| FEATURE | BENEFIT |
|-----------------------|-------------------------------|
| Shock Absorbers | Maximize Comfort & Stability |
| Height Control System | Maintains Optimal Ride Height |
| Custom Spring Arm | Optimizes Handling |
| Existing Frame Holes | Reduces Install Time |
| Adjustable Shims | For Axle Alignment |


SUSPENSION SPECIFICATIONS

| | |
|--------------------------|--|
| MODEL | GM 4500/5500 4x4 Chassis Cab & Cutaway |
| YEAR | 2006 - Newer 2005 with Dana S110 Axle |
| RIDE HEIGHT | 16.33" |
| AIR SPRING DESIGN HEIGHT | 11.1" |
| AXLE TRAVEL | 3.00" Jounce (M/M) 3.00" Rebound (M/M) |
| OE AXLE | Dana 80 (11K Axle) Dana S110 Axle (13.5K Axle) HD2 RPO |
| LINK PART NUMBER | 8M000070 Dana 80, 11K Axle Kit 8M000071 Dana S110, 13.5K Axle Kit 8M000092 |
| STYLE | Spring Arm/ Trailing Arm |
| WEIGHT | 260 LBS |
| CAPACITY | 11,000 LBS & 13,500 LBS |

TOP VIEW

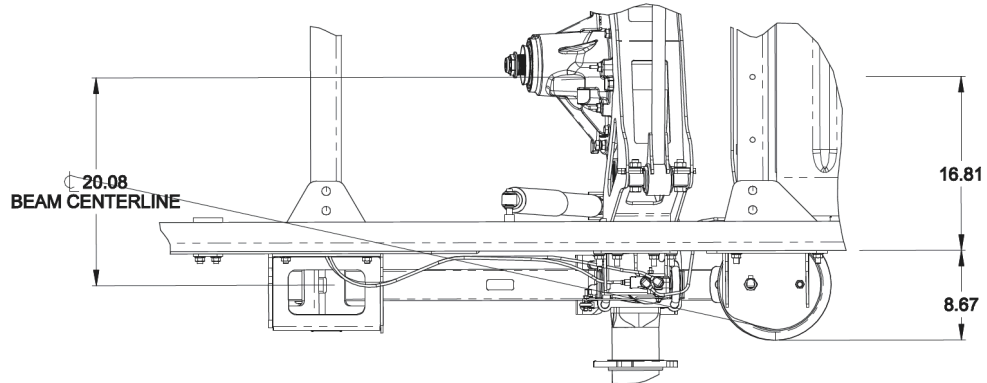

SIDE VIEW

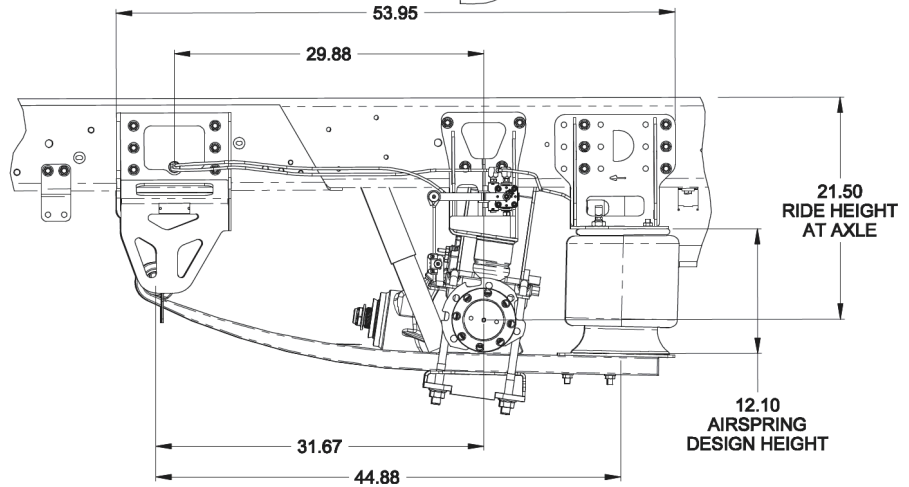

INSTALLATION NOTES

The OE jounce bumper is almost engaged with suspension at Design Height.

Suspension will not fit the N-12 exhaust (rear exit option) on any chassis other than C5V specification.

Suspension will not fit trucks with the J-69 In Wheel Park Brake option.

Frame may need drilling to fit NK1, N21, B3D, NG6 Fuel Tank Options.