


Link® Auxiliary Suspensions

ORDER GUIDE SPECIFICATIONS SERVICE PARTS AND KITS

8A000729 DuraLift 13.5
13,500 LB. CAPACITY

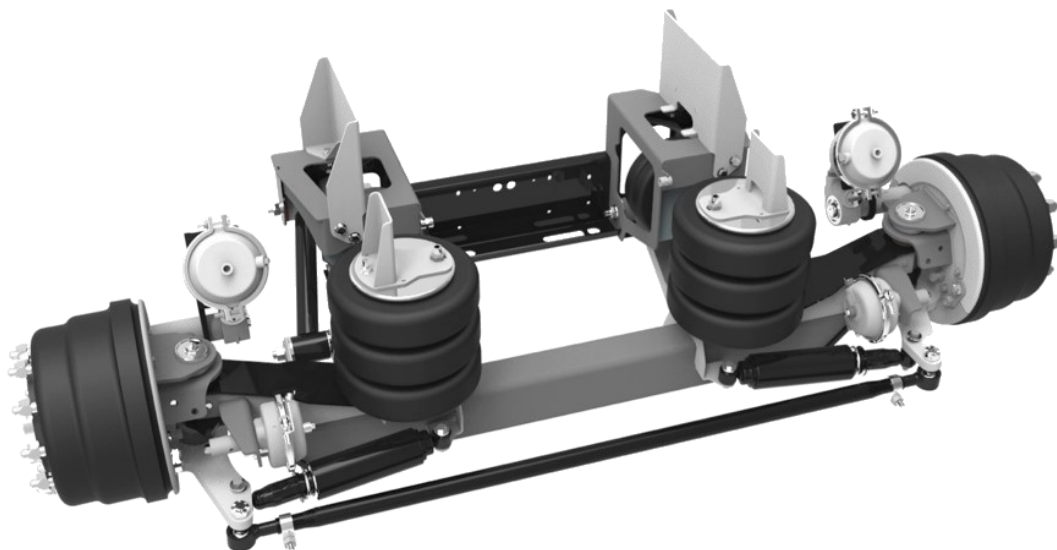

The DuraLift 13.5 is a lightweight, 13,500 pound capacity, self-steering lift axle that incorporates several unique features. The patented, interchangeable ride height brackets allow the installer to manage inventory dollars and still have a lift axle available for almost any truck or trailer. The improved lift spring geometry of the DuraLift 13.5 assures longer life of the lift springs and less downtime for the owner. The compact mounting envelope (22.3") combined with the integrated air control system (optional) saves valuable frame rail space. The separate ride height brackets and pre-plumbed integrated air control kit can save up to 2-3 hours of installation time.

*Link Mfg. Ltd.
223 15th St. N.E.
Sioux Center, IA USA
51250-2120
www.linkmfg.com*

**QUESTIONS?
CALL CUSTOMER
SERVICE
1-800-222-6283**

LS_BOOK_8A000729
MAY 20, 2015

SUSPENSION-AXLE, UNITIZED (BASE UNIT)

- ☐ 8A000729 AUXILIARY SUSPENSION, DURALIFT 13.5 SELF-STEER

**Order
Guide**

WHEEL END KIT, (CHOOSE ONE)

- ☐ 840A0166 3/4" STUD PILOTED HUBS & DRUMS
☐ 840A0167 HUB PILOTED HUBS & DRUMS
☐ 840A0168 HUB PILOTED HUBS & DRUMS FOR USE WITH 19.5 WHEELS
☐ 840A0169 LESS HUBS & DRUMS
(BEARINGS, SEALS, & HARDWARE ONLY - CUSTOMER / UPFITTER INSTALLED)

FRAME BRACKET KITS, (CHOOSE ONE)**STANDARD PROFILE FRAME BRACKETS**

- ☐ 8A000491 TRUCK MOUNT 8.0 TO 10.5" RIDE HEIGHT
☐ 8A000492 TRUCK MOUNT 10.0 TO 12.5" RIDE HEIGHT
☐ 8A000493 TRUCK MOUNT 12.0 TO 14.5" RIDE HEIGHT
☐ 8A000494 TRUCK MOUNT 14.0 TO 16.5" RIDE HEIGHT
☐ 8A000496 TRAILER MOUNT 15.0 TO 17.5" RIDE HEIGHT
☐ 8A000497 TRAILER MOUNT 17.0 TO 19.5" RIDE HEIGHT

LOW PROFILE FRAME BRACKETS

- ☐ 8A000591 8.0 TO 10.5" RIDE HEIGHT
☐ 8A000592 10.0 TO 12.5" RIDE HEIGHT
☐ 8A000593 12.0 TO 14.5" RIDE HEIGHT

AIR CONTROL KITS (CHOOSE ONE)

- ☐ 13501004 STANDARD AIR CONTROL KIT (INSTALLATION KIT NOT INCLUDED)
☐ 13501019 GT AIR CONTROL KIT (INSTALLATION KIT NOT INCLUDED)
☐ 800A0263 AIR CONTROL KIT IN SEALED BOX (INSTALLATION KIT NOT INCLUDED)
☐ 800A0176 STANDARD INTEGRATED AIR CONTROL KIT (INCLUDES INSTALLATION KIT)
☐ 800A0177 INTEGRATED AIR CONTROL KIT WITH SEALED BOX, (INCLUDES INSTALLATION KIT)

OPTIONAL KITS (CHOOSE ONE)

- ☐ 800A0002 AIR TANK KIT, 1244 CU. IN. (MOUNTS TO SUSPENSION CROSSMEMBER)
☐ 800A0134 AIR TANK KIT, 700 CU. IN. (MOUNTS TO SUSPENSION CROSSMEMBER)
☐ 800A0014 INSTALLATION KIT (USED WITH AIR CONTROL KITS 13501004 OR 800A0263)
☐ 800A0256 GT INSTALLATION KIT (USED WITH AIR CONTROL KIT 13501019)
☐ 800A0032 FASTENER KIT 2"
☐ 800A0305 FASTENER KIT 2.5"
☐ 800A0205 DUST SHIELD KIT (1 PER AXLE REQUIRED) (CUSTOMER / UPFITTER INSTALLED)
☐ 800A0208 DUST SHIELD KIT (FACTORY INSTALLED)
☐ 800A0203 REVERSE LOCK KIT (CUSTOMER / UPFITTER INSTALLED)
☐ 800A0207 REVERSE LOCK KIT (FACTORY INSTALLED)
☐ 800A0206 FENDER INSTALLATION KIT (CUSTOMER / UPFITTER INSTALLED)
☐ 13501016 RATIO RELAY VALVE KIT

OPTIONAL FENDER KITS (CHOOSE ONE)

- ☐ 80002601 FENDER-PAIR, ALUM, 12" WIDE, LOW PROFILE
☐ 80002602 FENDER-PAIR, SS, 12" WIDE, LOW PROFILE
☐ 80002603 FENDER-PAIR, ALUM, 12" WIDE
☐ 80002604 FENDER-PAIR, SS, 12" WIDE
☐ 80002605 FENDER-PAIR, POLY, 12" WIDE, LOW PROFILE

To order your DuraLift 13.5 Auxiliary Suspension, use the order form on page 2 of this document to assist with your specific selections.

1. Order the Base Unit (Link part number 8A000729).
2. Choose the desired Wheel End Kit.
3. Order the Ride Height Bracket Kit.
 - a) Determine the Loaded Tire Radius on the chart below.
 - b) Subtract Loaded Tire Radius from Loaded Frame Height to find correct ride height.

Loaded Frame Height - Loaded Tire Radius = Ride Height

- c) Select the correct Ride Height Bracket part number from the chart from page 5 or 6 depending on your application.
4. Choose the desired Air Control Kit.
5. Select any additional Optional Equipment.
6. Call your Link Manufacturing Sales representative at the number below to place your order.

TRUCK QUICK SPECS

MODEL: DuraLift 13.5

TYPE: SELF-STEER

WEIGHT: 866 LBS

CAPACITY: 13.5K LBS

TRAVEL: 13"

LIFT: 9.5"

RIDE HEIGHT: 8" - 16.5"

ENVELOPE: 22.3"

FRAME WIDTH: 33.5" - 35"

TUBE TYPE	TUBELESS	ISO (METRIC)	LOADED TIRE RADIUS	DIAMETER
7.50R15		215/75R17.5	14	30.2
8.25R15	8.5R17.5	225/70R19.5	15	32.9
	9R17.5	245/70R19.5	15.5	33.1
	10R17.5		15.5	33.9
	8R19.5		16	34
10.00R15			16.5	35.8
7.50R20	8R22.5	255/70R22.5	17	36.5
	11R17.5	245/75R22.5	17	36.6
8.25R20	9R22.5	235/80R22.5	17.5	37.8
		255/75R22.5	17.5	37.7
		255/80R22.5	18	38.4
		265/75R22.5	18	38.2
		295/70R22.5	18.2	38.7
9.00R20	10R22.5	295/75R22.5	18.5	40.2
		275/80R22.5	19	40.4

TRAILER QUICK SPECS

MODEL: DuraLift 13.5

TYPE: SELF-STEER

WEIGHT: 866 LBS

CAPACITY: 13.5K LBS

TRAVEL: 13"

LIFT: 9.5"


RIDE HEIGHT: 15" - 19.5"

ENVELOPE: 22.3"


FRAME WIDTH: VARIES

TUBE TYPE	TUBELESS	ISO (METRIC)	LOADED TIRE RADIUS	DIAMETER
	11R22.5	295/80R22.5	19.5	41.9
10.00R20		445/65R19.5	19.5	42.6
		285/75R24.5	19.5	42.7
		315/80R22.5	19.9	42.8
		385/65R22.5	19.5	42.3
		275/80R24.5	19.5	41.3
11.00R20	12R22.5		20	42.8
10.00R22	13R22.5	425/65R22.5	20.5	44.5
12.00R20	11R24.5		20.5	44
11.00R22	12R24.5	445/65R22.5	21	45
12.00R22			21.5	46
13.00R20	13R24.5		21.5	46.3
11.00R24			22	47.6
12.00R24			23	49.4


Truck Application

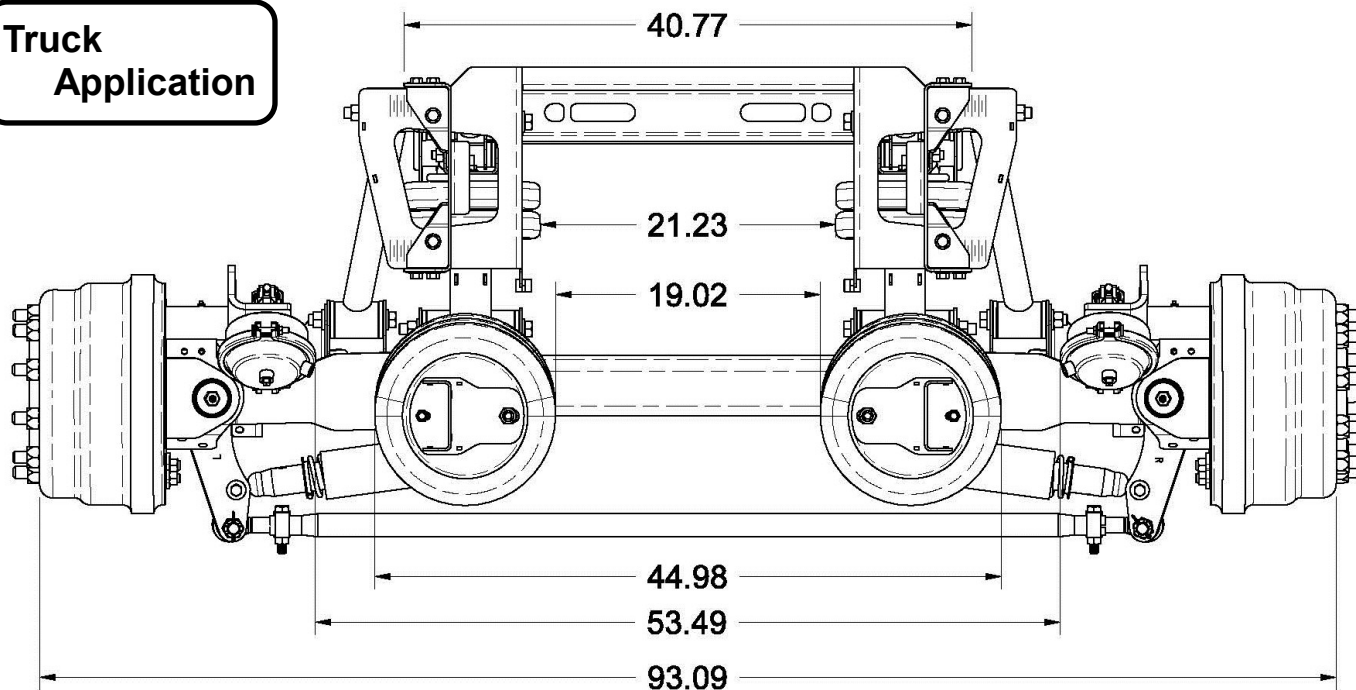


FRAME KIT 8A000491

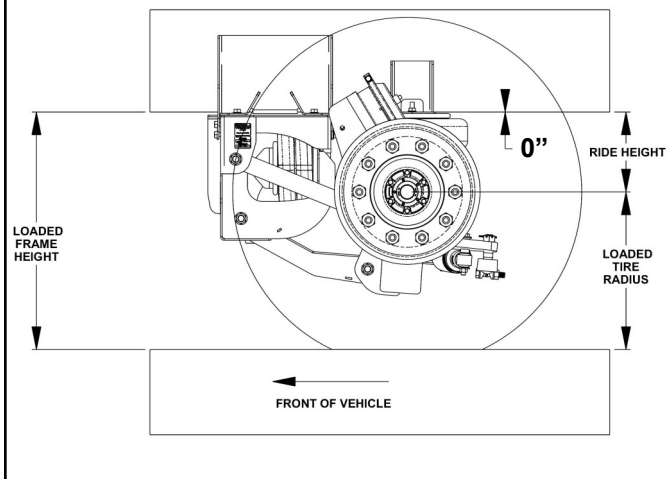


FRAME KIT 8A000492

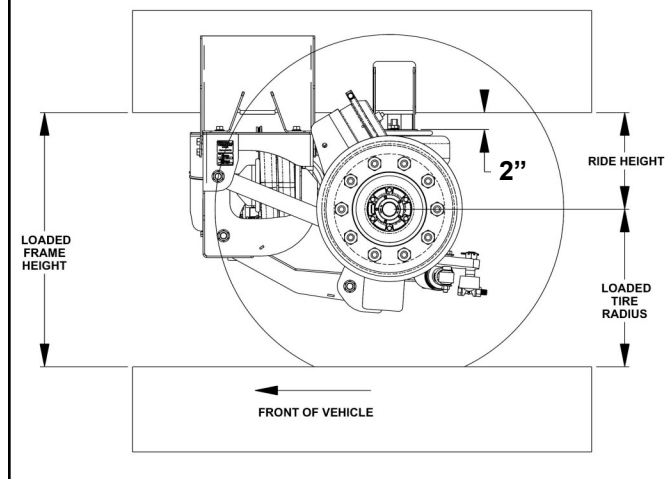

FRAME KIT 8A000493

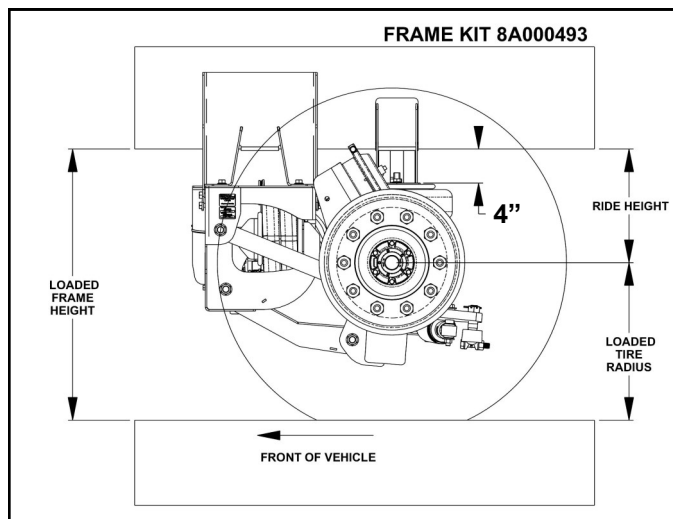

FRAME KIT 8A000494

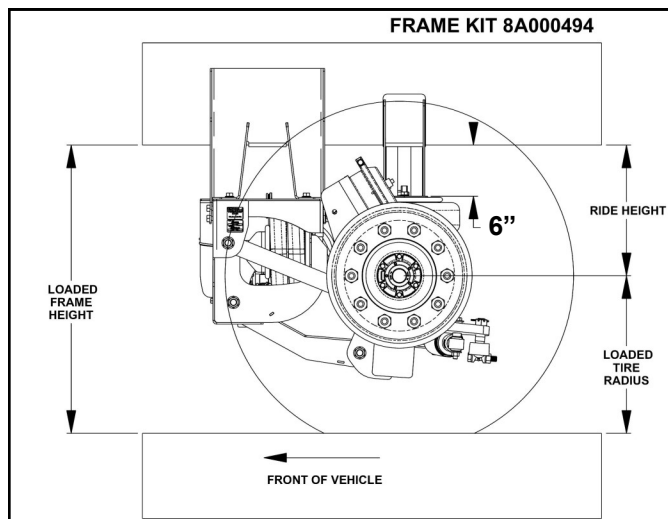




13.5 LIFT CHART	RIDE HEIGHT 8.0" - 10.5" (FRAME MOUNT KIT 8A000491)																	
LOADED FRAME HEIGHT	23.0	23.5	24.0	24.5	25.0	25.5	26.0	26.5	27.0	27.5	28.0	28.5	29.0	29.5	30.0	30.5	31.0	31.5
TIRE RADIUS																		
15 (LOADED)	7.0	7.5	8.0	8.5	9.0	9.5												
16 (LOADED)			7.0	7.5	8.0	8.5	9.0	9.5										
17 (LOADED)					7.0	7.5	8.0	8.5	9.0	9.5								
18 (LOADED)							7.0	7.5	8.0	8.5	9.0	9.5						
19 (LOADED)									7.0	7.5	8.0	8.5	9.0	9.5				
20 (LOADED)											7.0	7.5	8.0	8.5	9.0	9.5		
21 (LOADED)													7.0	7.5	8.0	8.5	9.0	9.5

13.5 LIFT CHART	RIDE HEIGHT 10.0" - 12.5" (FRAME MOUNT KIT 8A000492)																	
LOADED FRAME HEIGHT	25.0	25.5	26.0	26.5	27.0	27.5	28.0	28.5	29.0	29.5	30.0	30.5	31.0	31.5	32.0	32.5	33.0	33.5
TIRE RADIUS																		
15 (LOADED)	7.0	7.5	8.0	8.5	9.0	9.5												
16 (LOADED)			7.0	7.5	8.0	8.5	9.0	9.5										
17 (LOADED)					7.0	7.5	8.0	8.5	9.0	9.5								
18 (LOADED)							7.0	7.5	8.0	8.5	9.0	9.5						
19 (LOADED)									7.0	7.5	8.0	8.5	9.0	9.5				
20 (LOADED)											7.0	7.5	8.0	8.5	9.0	9.5		
21 (LOADED)													7.0	7.5	8.0	8.5	9.0	9.5

13.5 LIFT CHART	RIDE HEIGHT 12.0" - 14.5" (FRAME MOUNT KIT 8A000493)																	
LOADED FRAME HEIGHT	27.0	27.5	28.0	28.5	29.0	29.5	30.0	30.5	31.0	31.5	32.0	32.5	33.0	33.5	34.0	34.5	35.0	35.5
TIRE RADIUS																		
15 (LOADED)	7.0	7.5	8.0	8.5	9.0	9.5												
16 (LOADED)			7.0	7.5	8.0	8.5	9.0	9.5										
17 (LOADED)					7.0	7.5	8.0	8.5	9.0	9.5								
18 (LOADED)							7.0	7.5	8.0	8.5	9.0	9.5						
19 (LOADED)									7.0	7.5	8.0	8.5	9.0	9.5				
20 (LOADED)											7.0	7.5	8.0	8.5	9.0	9.5		
21 (LOADED)													7.0	7.5	8.0	8.5	9.0	9.5

13.5 LIFT CHART	RIDE HEIGHT 14.0" - 16.5" (FRAME MOUNT KIT 8A000494)																	
LOADED FRAME HEIGHT	29.0	29.5	30.0	30.5	31.0	31.5	32.0	32.5	33.0	33.5	34.0	34.5	35.0	35.5	36.0	36.5	37.0	37.5
TIRE RADIUS																		
15 (LOADED)	7.0	7.5	8.0	8.5	9.0	9.5												
16 (LOADED)			7.0	7.5	8.0	8.5	9.0	9.5										
17 (LOADED)					7.0	7.5	8.0	8.5	9.0	9.5								
18 (LOADED)							7.0	7.5	8.0	8.5	9.0	9.5						
19 (LOADED)									7.0	7.5	8.0	8.5	9.0	9.5				
20 (LOADED)											7.0	7.5	8.0	8.5	9.0	9.5		
21 (LOADED)													7.0	7.5	8.0	8.5	9.0	9.5

Trailer Application

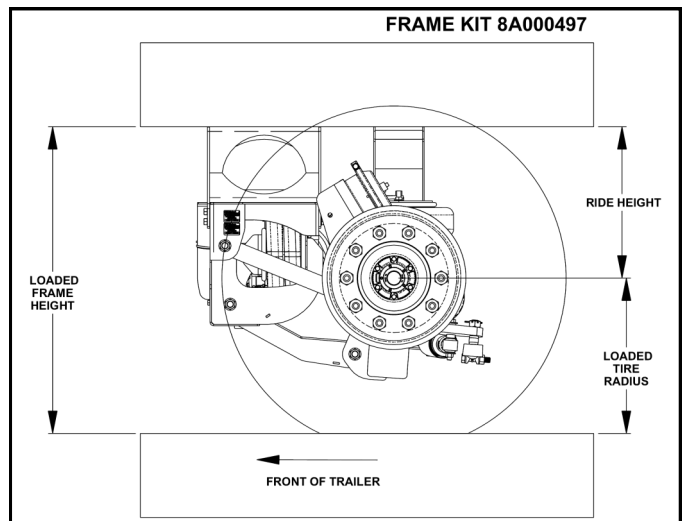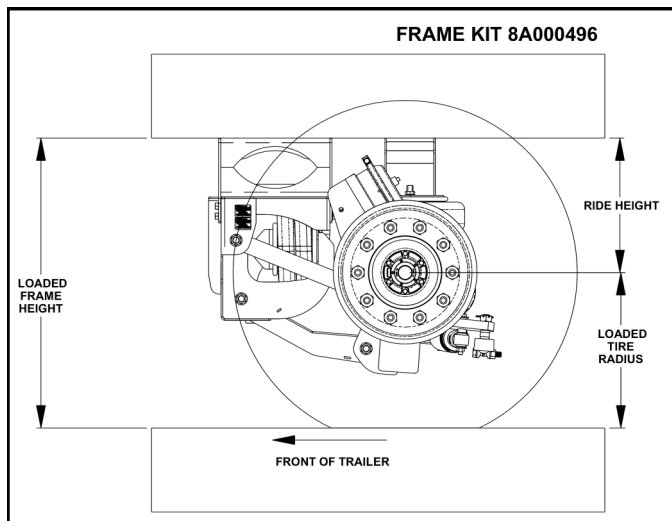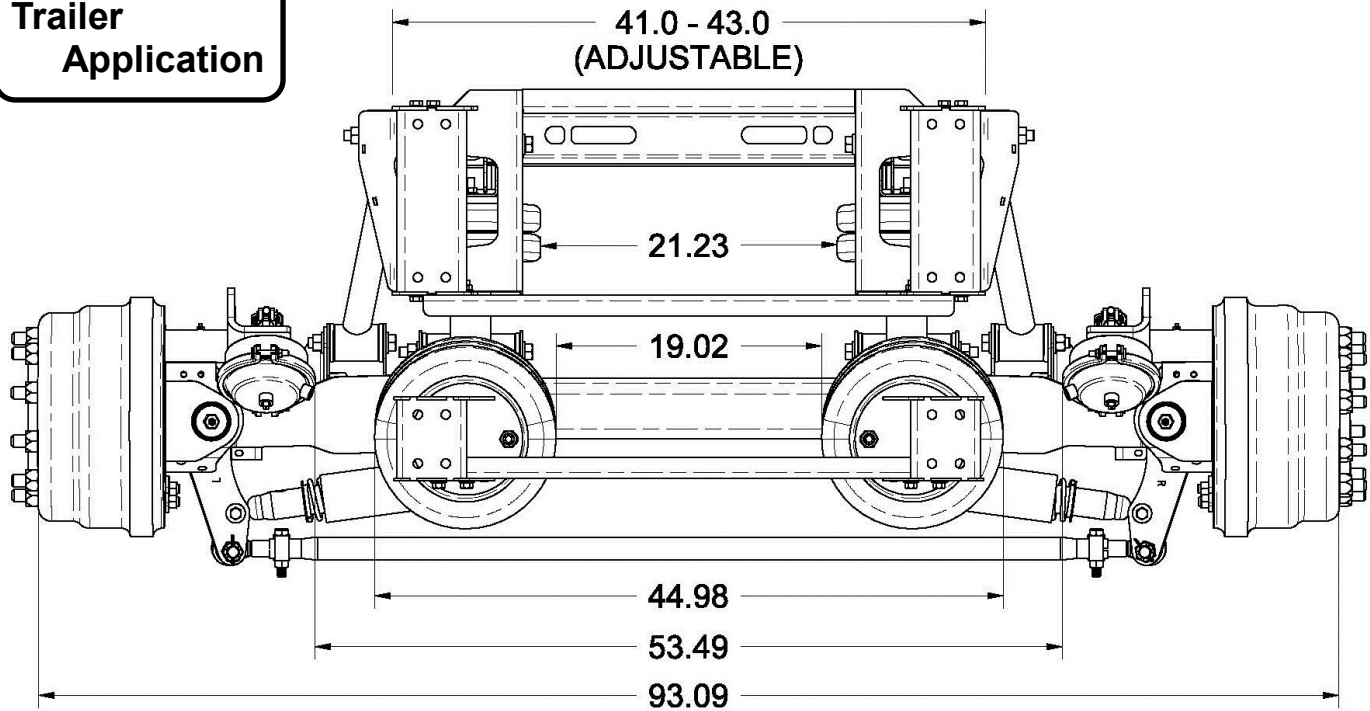


13.5K LIFT CHART	RIDE HEIGHT 15.0" - 17.5" (FRAME MOUNT KIT 8A000496)														
LOADED FRAME HEIGHT	32.0	32.5	33.0	33.5	34.0	34.5	35.0	35.5	36.0	36.5	37.0	37.5	38.0	38.5	
TIRE RADIUS															
17 (LOADED)	7.0	7.5	8.0	8.5	9.0	9.5									
18 (LOADED)			7.0	7.5	8.0	8.5	9.0	9.5							
19 (LOADED)					7.0	7.5	8.0	8.5	9.0	9.5					
20 (LOADED)							7.0	7.5	8.0	8.5	9.0	9.5			
21 (LOADED)									7.0	7.5	8.0	8.5	9.0	9.5	

13.5K LIFT CHART	RIDE HEIGHT 17.0" - 19.5" (FRAME MOUNT KIT 8A000497)														
LOADED FRAME HEIGHT	34.0	34.5	35.0	35.5	36.0	36.5	37.0	37.5	38.0	38.5	39.0	39.5	40.0	40.5	
TIRE RADIUS															
17 (LOADED)	7.0	7.5	8.0	8.5	9.0	9.5									
18 (LOADED)			7.0	7.5	8.0	8.5	9.0	9.5							
19 (LOADED)					7.0	7.5	8.0	8.5	9.0	9.5					
20 (LOADED)							7.0	7.5	8.0	8.5	9.0	9.5			
21 (LOADED)									7.0	7.5	8.0	8.5	9.0	9.5	

Wheel End Kits


840A0166 - WHEEL END KIT

ITEM	PART NUMBER	DESCRIPTION	QTY
1	84001403	BEARING-ROLLER, CONE OUTER	2
2	84001404	BEARING-ROLLER, CONE INNER	2
3	84001501	ASSEMBLY-HUB & DRUM, STUD (RH) 15 X 4	1
4	84001502	ASSEMBLY-HUB & DRUM, STUD (LH) 15 X 4	1
5	84001687	SEAL-OIL	2
6	84002106	CAP-HUB, 6 HOLE, 4.5" BOLT CIRCLE	2
7	84002126	NUT-PRO-TORQ, 1.5-12	2
8	14011006	5/16 X 3/4 UNC HEX CAP SCR (GR5)	12
9	14851000	5/16 LOCK WASHER	12

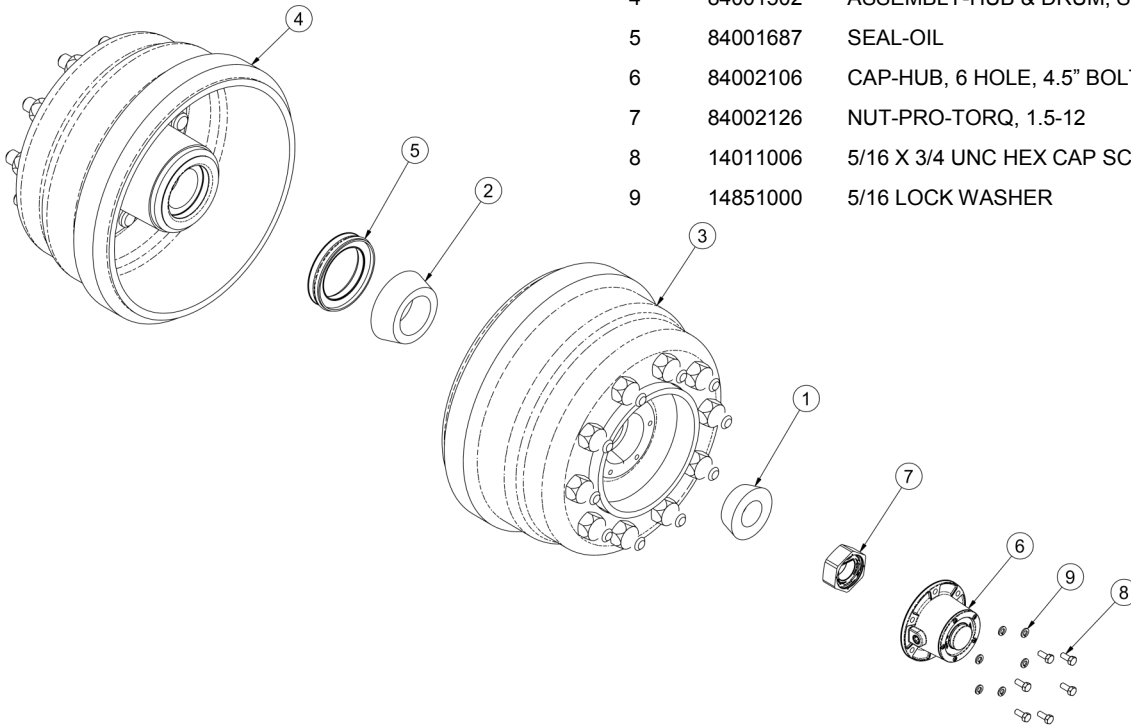


840A0167 - WHEEL END KIT

ITEM	PART NUMBER	DESCRIPTION	QTY
1	84001403	BEARING-ROLLER, CONE OUTER	2
2	84001404	BEARING-ROLLER, CONE INNER	2
3	84001687	SEAL-OIL	2
4	84002106	CAP-HUB, 6 HOLE, 4.5" BOLT CIRCLE	2
5	84002126	NUT-PRO-TORQ, 1.5-12	2
6	14011006	5/16 X 3/4 UNC HEX CAP SCR (GR5)	12
7	14851000	5/16 LOCK WASHER	12
8	84001503A	ASSEMBLY-HUB & DRUM, FN-15X4	2

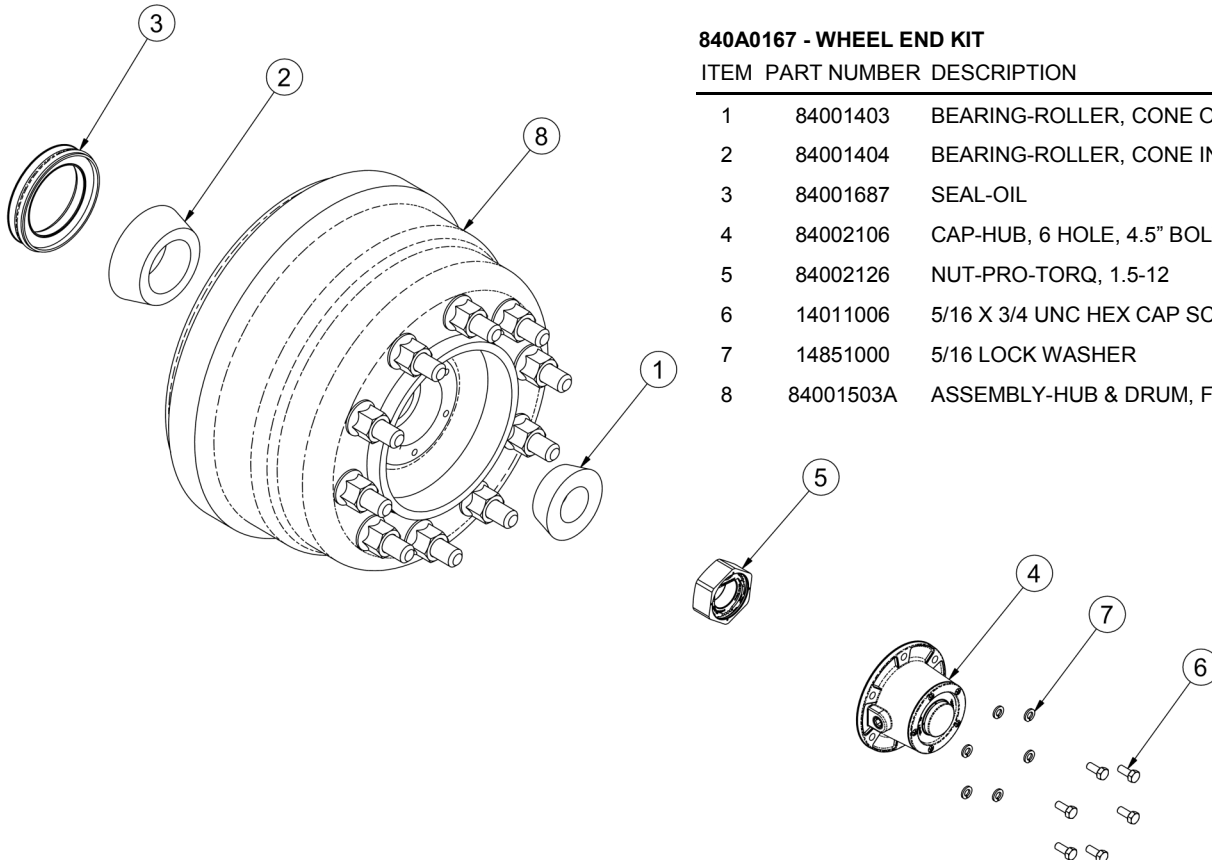


Wheel End Kits

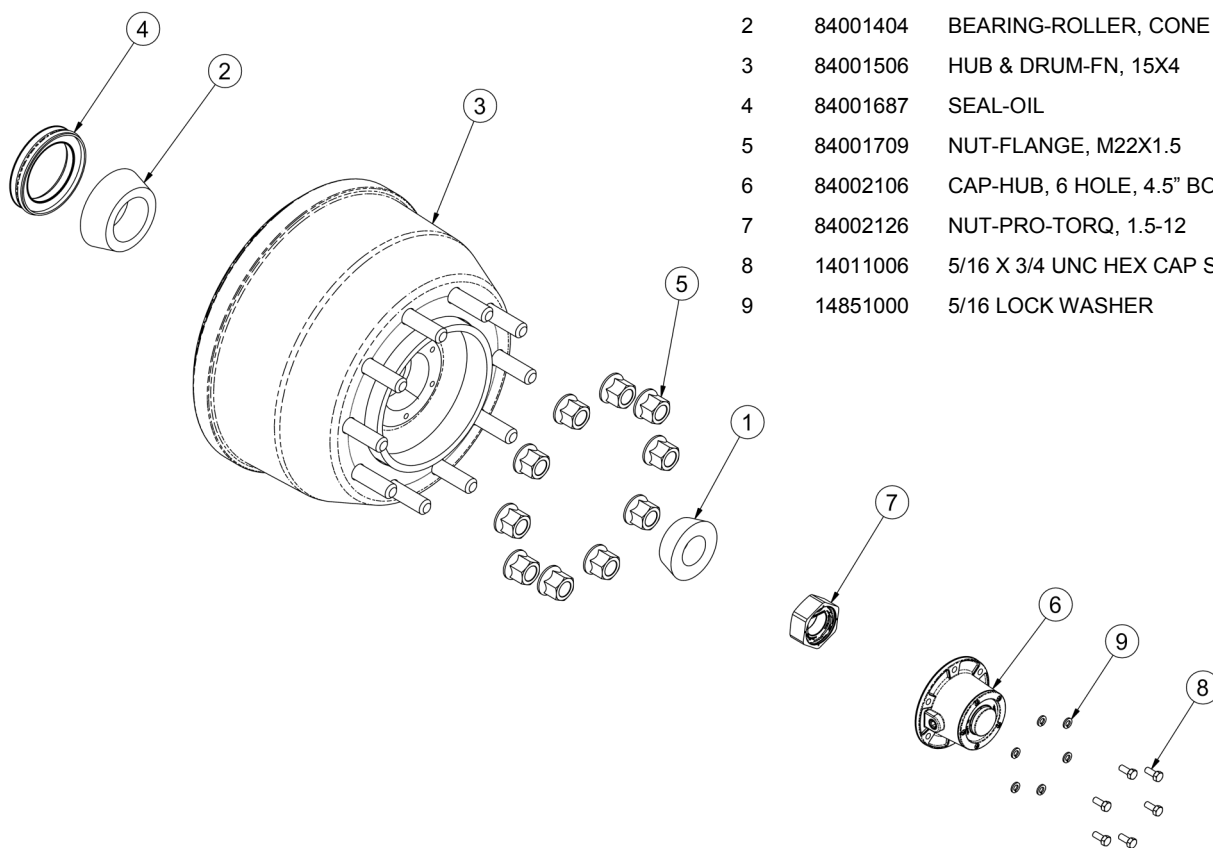

840A0168 - WHEEL END KIT


ITEM	PART NUMBER	DESCRIPTION	QTY
1	84001403	BEARING-ROLLER, CONE OUTER	2
2	84001404	BEARING-ROLLER, CONE INNER	2
3	84001506	HUB & DRUM-FN, 15X4	2
4	84001687	SEAL-OIL	2
5	84001709	NUT-FLANGE, M22X1.5	10
6	84002106	CAP-HUB, 6 HOLE, 4.5" BOLT CIRCLE	2
7	84002126	NUT-PRO-TORQ, 1.5-12	2
8	14011006	5/16 X 3/4 UNC HEX CAP SCR (GR5)	12
9	14851000	5/16 LOCK WASHER	12

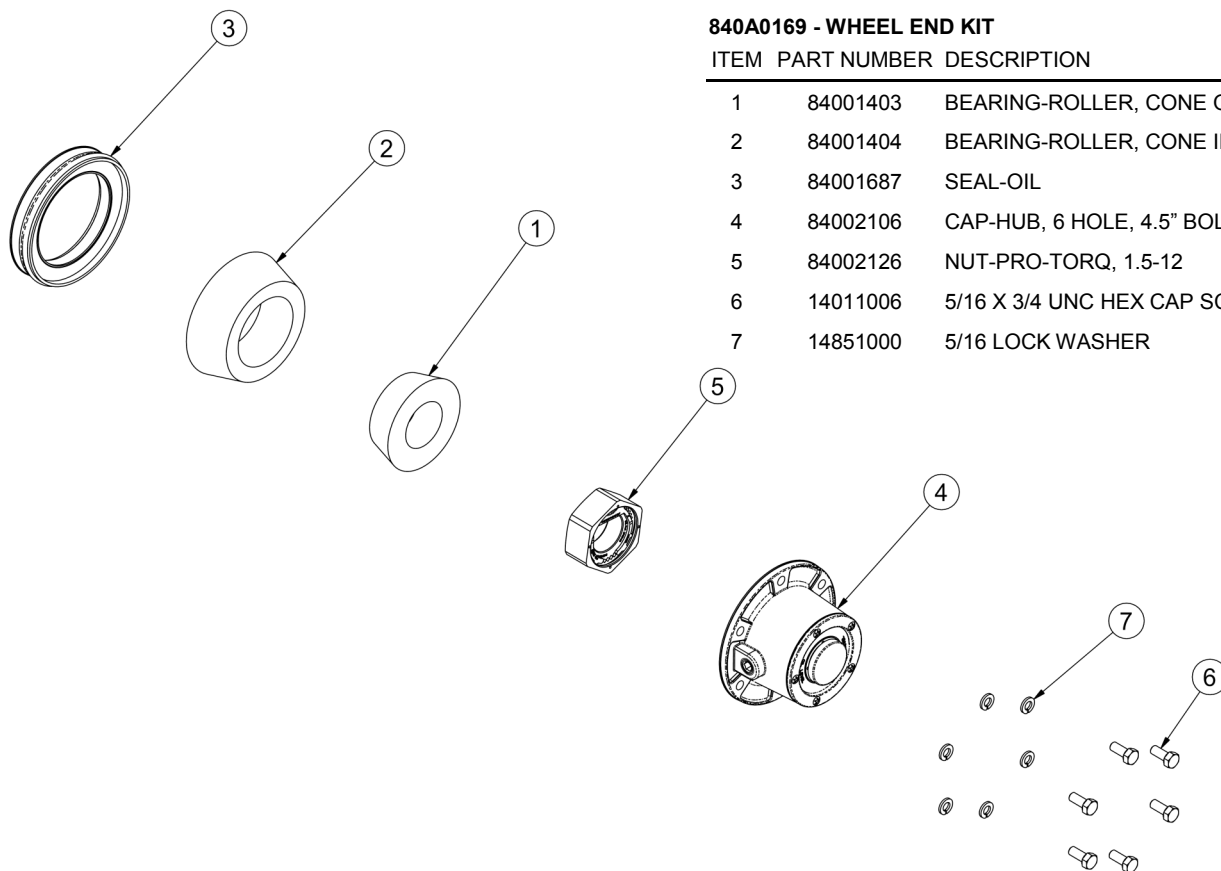

840A0169 - WHEEL END KIT


ITEM	PART NUMBER	DESCRIPTION	QTY
1	84001403	BEARING-ROLLER, CONE OUTER	2
2	84001404	BEARING-ROLLER, CONE INNER	2
3	84001687	SEAL-OIL	2
4	84002106	CAP-HUB, 6 HOLE, 4.5" BOLT CIRCLE	2
5	84002126	NUT-PRO-TORQ, 1.5-12	2
6	14011006	5/16 X 3/4 UNC HEX CAP SCR (GR5)	12
7	14851000	5/16 LOCK WASHER	12

Service Parts

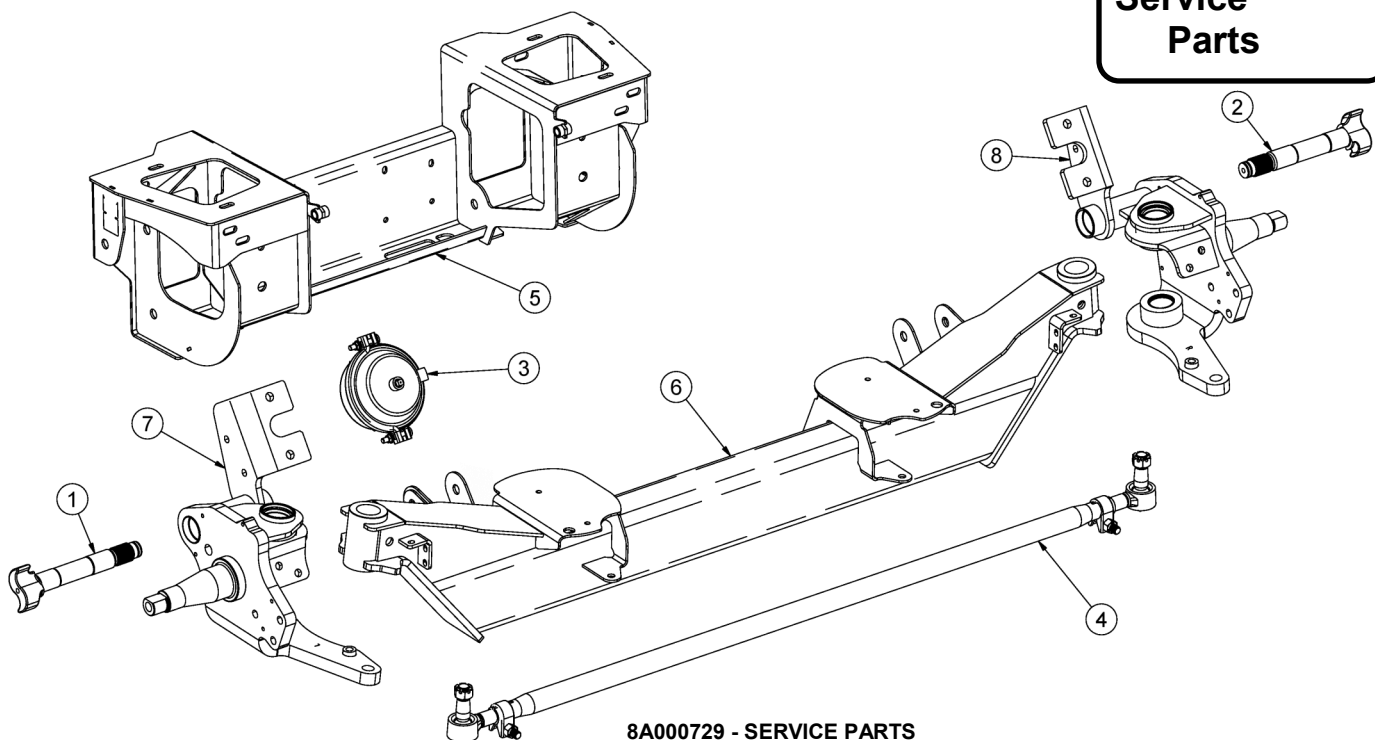

8A000729 - SERVICE PARTS


ITEM	PART NUMBER	DESCRIPTION	QTY
1	84002069	CAMSHAFT-LH, 15X4 Q PLUS	1
2	84002070	CAMSHAFT-RH, 15X4 Q PLUS	1
3	84002076	CHAMBER-BRAKE, TYPE 20	2
4	84002092	ASSEMBLY-ROD, TIE	1
5	810A0104	HANGER-WELDMENT	1
6	830A0316	AXLE-FABRICATED, 13.5K	1
7	840A0160	KNUCKLE-MACHINED, LH ASSY	1
8	840A0161	KNUCKLE-MACHINED, RH ASSY	1

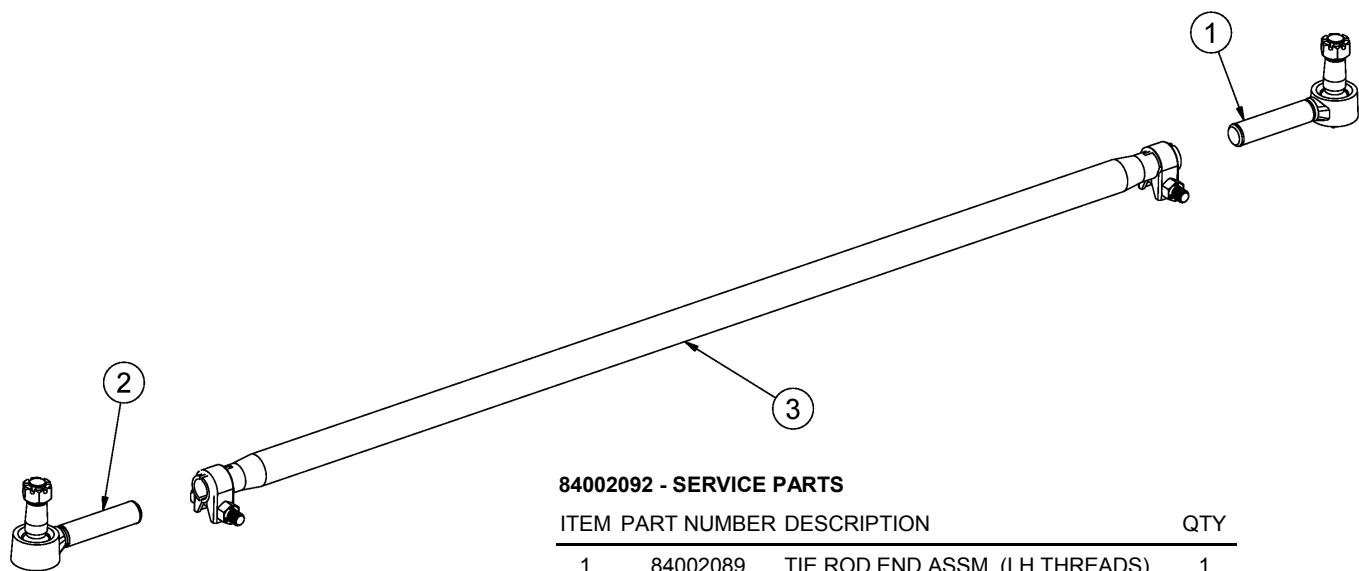

84002092 - SERVICE PARTS

ITEM	PART NUMBER	DESCRIPTION	QTY
1	84002089	TIE ROD END ASSM. (LH THREADS)	1
2	84002090	TIE ROD END ASSM. (RH THREADS)	1
3	84002091	ASSEMBLY-TUBE, TIE ROD	1


Service Parts

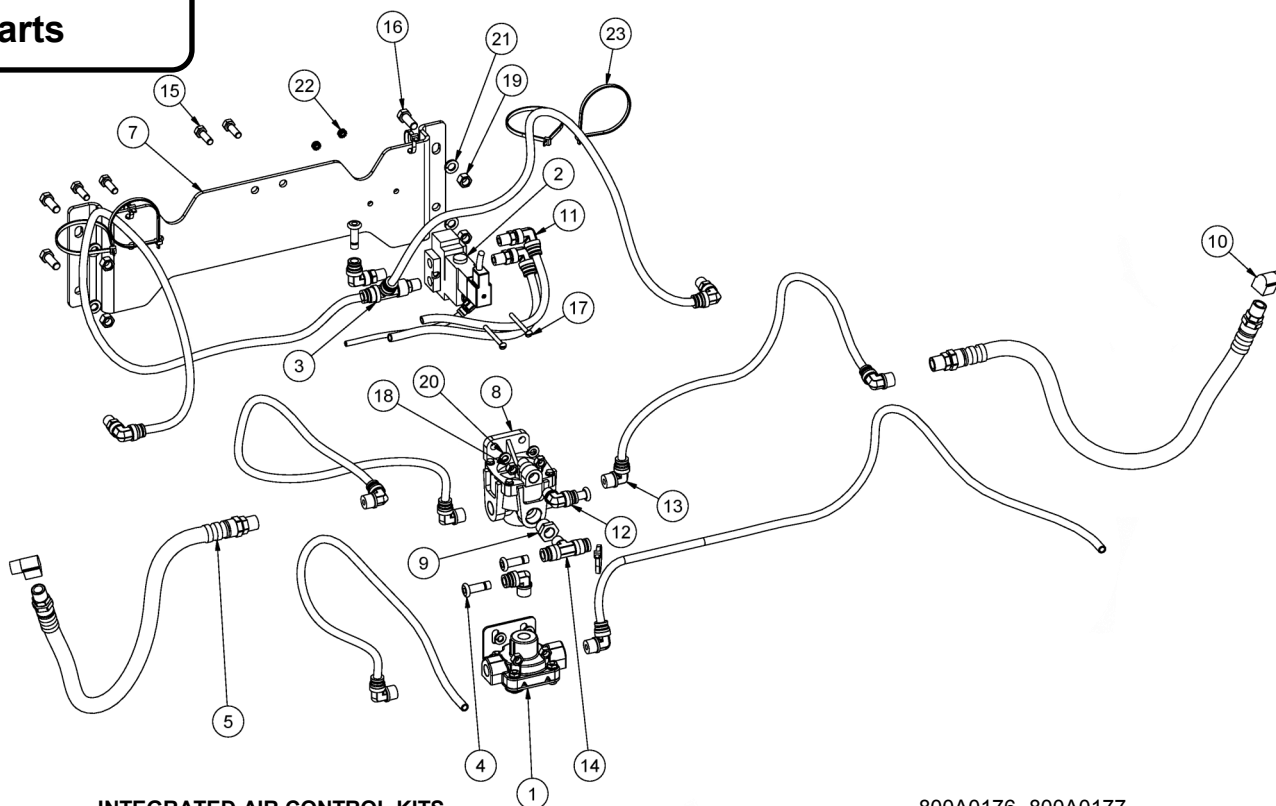

INTEGRATED AIR CONTROL KITS

800A0176 800A0177


ITEM	PART NUMBER	DESCRIPTION	QTY	QTY
1	13010546	VALVE-QUICK RELEASE	1	1
2	13010555	VALVE-SOLENOID, 4 WAY, 12 V	1	1
3	13025132	TEE-RUN, 1/4 M-NPT, 3/8 TUBE	1	1
4	13025181	PLUG-PTC, 3/8	4	4
5	13029972	ASSEMBLY-AIR BRAKE HOSE (26 IN.)	2	2
-	13034000	AIRLINE-NYLON, 3/8" BULK (FEET)	19.3	19.3
7	80003193	PLATE-VALVE STACK	1	1
8	13010508	RELAY VALVE, RG-2, MIDLAND	1	1
9	13022018	BUSHING-REDUCER, 1/2 M-NPT - 1/4 F-NPT	1	1
10	13022102	ELBOW, 90 STREET (3/8-NPT)	2	2
11	13025094	ELBOW-SWIV, 3/8 TB, 1/4 M-NPT	2	2
12	13025104	ELBOW-3/8 TB, 1/4 M-NPT	1	1
13	13025105	ELBOW-3/8 TB, 3/8 M-NPT	7	7
14	13025143	TEE-BRANCH, 1/4 M-NPT, 3/8 TUBE	1	1
15	-	5/16 X 1 UNC HEX CAP SCR (GR 8) O&P	4	4
16	-	3/8 X 1 UNC HEX CAP SCR (GR 8) O&P	4	4
17	-	10-32 X 2 ROUND HEAD MACH. SCREW	2	2
18	-	5/16 UNC HEX NUT (GR B) O&P	4	4
19	-	3/8 UNC HEX NUT (GR B)	4	4
20	-	5/16 LOCK WASHER OIL&PHOS	4	4
21	-	3/8 LOCK WASHER	4	4
22	-	10-32 KEP NUT	2	2
23	-	NYLON CABLE TIE, 11" LONG	7	7
-	800A0303	KIT-INSTALL, DLII INTEGRATED AIR, STANDARD	1	-
-	800A0304	KIT-INSTALL, DLII INTEGRATED AIR, SEALED	-	1

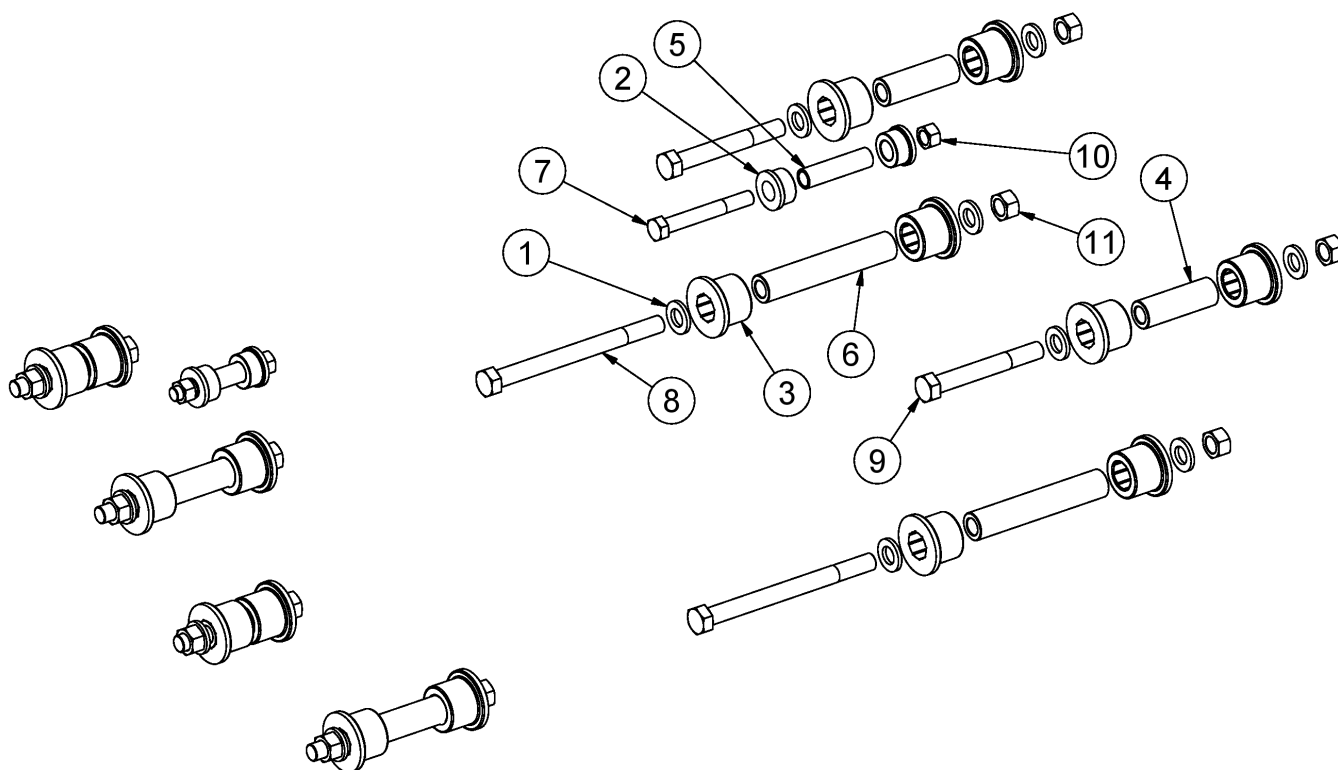

800A0319 - COMPLETE BUSHING SERVICE KIT


ITEM	DESCRIPTION	QTY
1	3/4 HARDENED WASHER, ZINC PLATED	16
2	BUSHING	4
3	BUSHING	16
4	TUBE-BUSHING	4
5	TUBE-BUSHING	2
6	TUBE-BUSHING	4
7	5/8 X 4 3/4 UNF HEX CAP SCR (GR 8) O&P	2
8	3/4 X 9 UNF HEX CAP SCR (GR 8) O&P	4
9	3/4 X 5 3/4 UNF HEX CAP SCR (GR 8) O&P	4
10	5/8 UNF HEX TOP LOCK NUT (GR C) O&P	2
11	3/4 UNF HEX TOP LOCK NUT (GR C) O&P	8

Service Kits

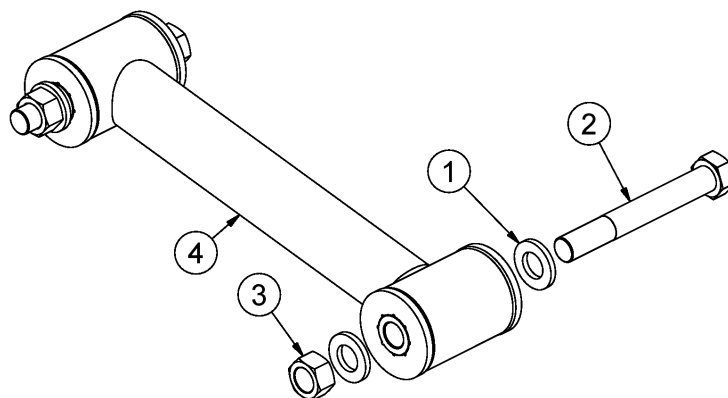


800A0320 - UPPER ARM SERVICE KIT

ITEM DESCRIPTION	QTY
1 3/4 HARDENED WASHER, ZINC PLATED	4
2 3/4 X 5 3/4 UNF HEX CAP SCR (GR 8) O&P	2
3 3/4 UNF HEX TOP LOCK NUT (GR C) O&P	2
4 ARM-CONNECTING - ASSY	1

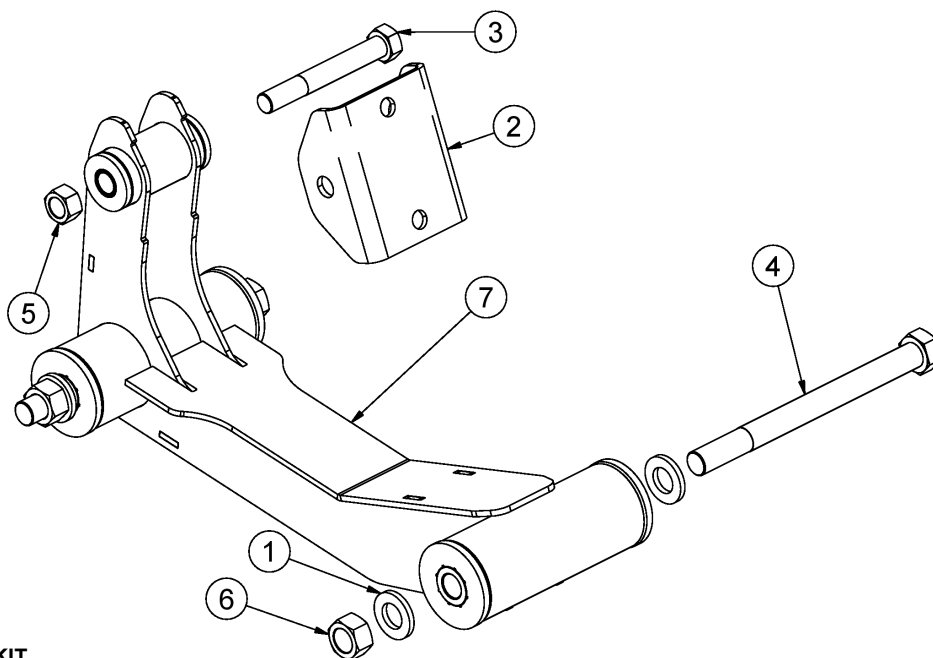


800A0321 - LOWER ARM SERVICE KIT

ITEM DESCRIPTION	QTY
1 3/4 HARDENED WASHER, ZINC PLATED	4
2 PLATE-SWIVEL, LIFT	1
3 5/8 X 4 3/4 UNF HEX CAP SCR (GR 8) O&P	1
4 3/4 X 9 UNF HEX CAP SCR (GR 8) O&P	2
5 5/8 UNF HEX TOP LOCK NUT (GR C) O&P	1
6 3/4 UNF HEX TOP LOCK NUT (GR C) O&P	2
7 WELDMENT-LIFT ARM ASSY	1

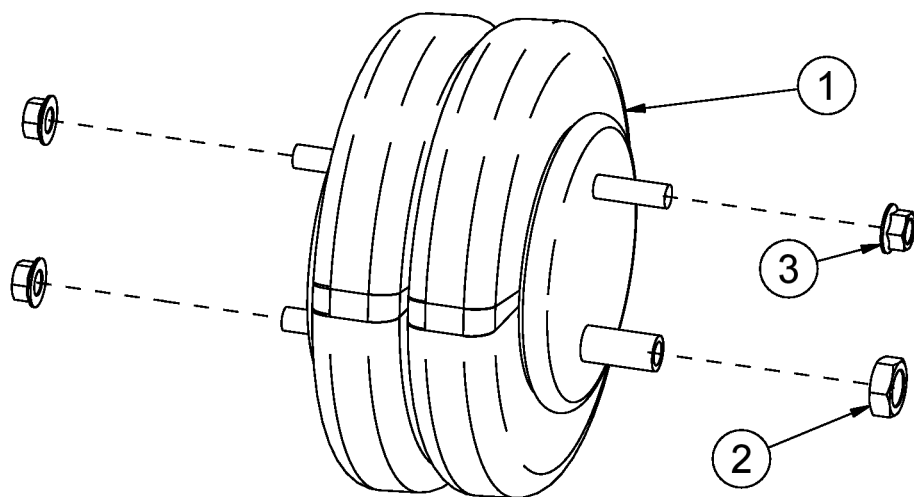
800A0322 - LIFT SPRING SERVICE KIT

ITEM DESCRIPTION	QTY
1 SPRING-AIR	1
2 3/4 UNF HEX JAM NUT, O&P	1
3 1/2 UNC SERRATED FLANGE NUT	3

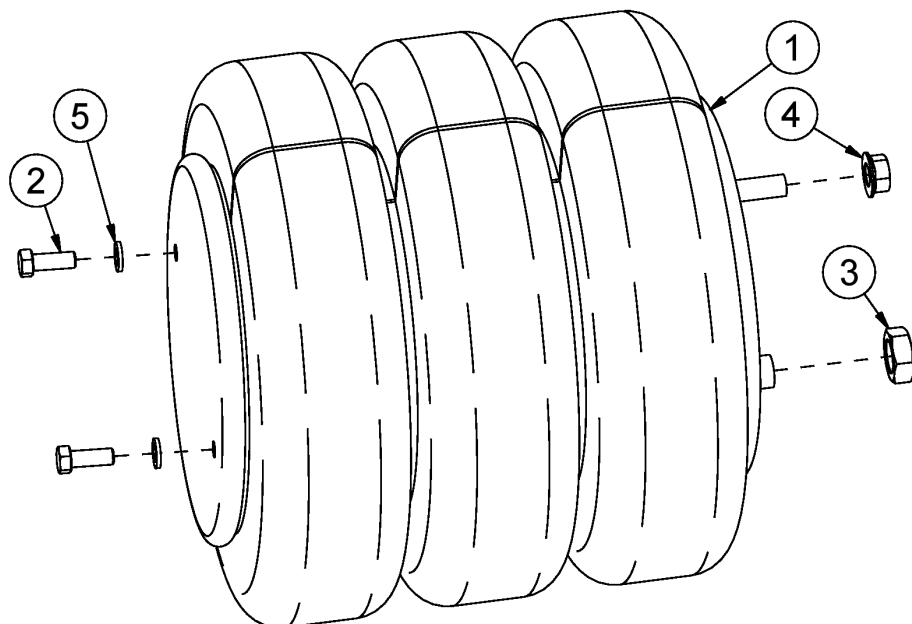

800A0323 - LOAD SPRING SERVICE KIT

ITEM DESCRIPTION	QTY
1 SPRING-AIR	1
2 3/8 X 1 UNC HEX CAP SCR (GR 8) O&P	2
3 3/4 UNF HEX JAM NUT, O&P	1
4 1/2 UNC SERRATED FLANGE NUT	1
5 3/8 LOCK WASHER	2

Service Kits


800A0324 - COMPLETE KINGPIN SERVICE KIT

ITEM DESCRIPTION	QTY
1 PIN-DRAW, LOCKING	2
2 BEARING-THRUST	2
3 SHIM (.030)	2
4 SHIM (.010)	2
5 SHIM (.005)	2
6 BUSHING-KNUCKLE	4
7 SEAL-KNUCKLE	4
8 PIN-KING, 13.5K (1.88)	2
9 CAP-KING PIN	4
10 FITTING-GREASE, 1/8-27 STR THD FORM	4
11 7/16 UNC TOP LOCK FL NUT (GR G) O&P	2

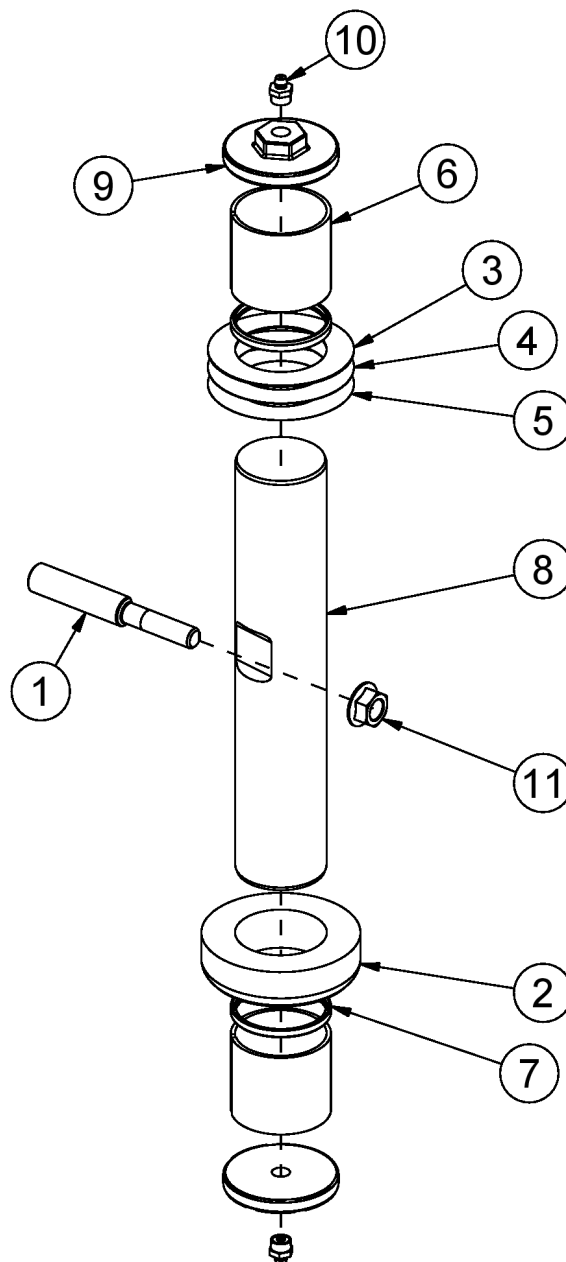


800A0325 - COMPLETE KINGPIN SHIM KIT

ITEM DESCRIPTION	QTY
1 SHIM (.030)	2
2 SHIM (.010)	2
3 SHIM (.005)	2

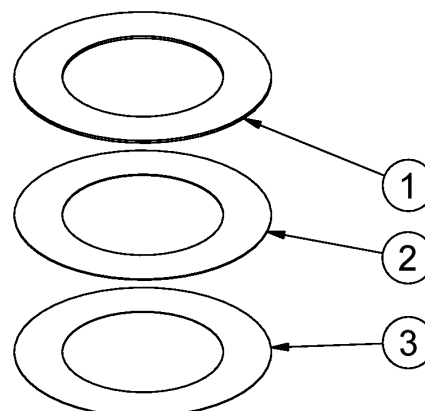


Service Kits

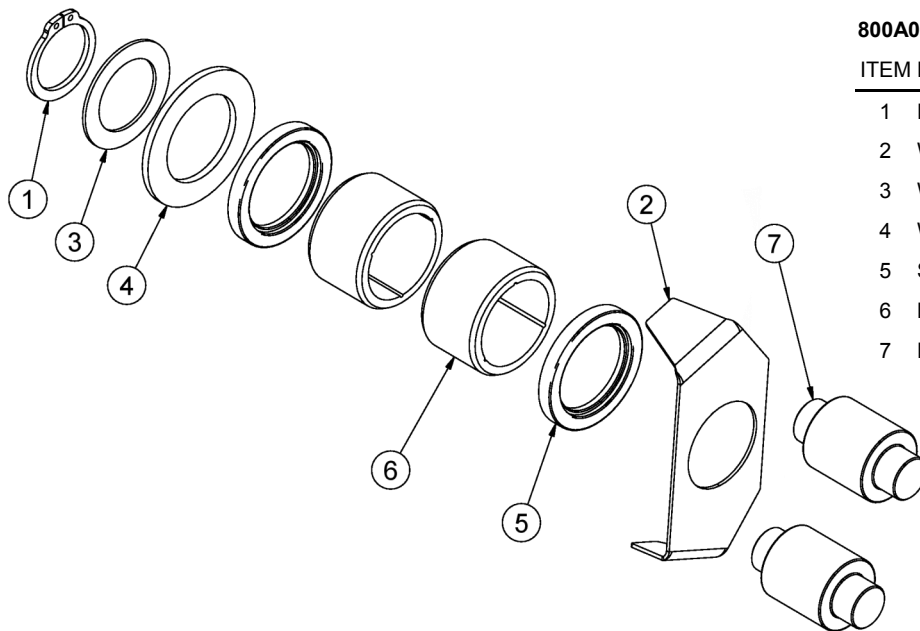

800A0326 - COMPLETE CAM SERVICE KIT


ITEM DESCRIPTION	QTY
1 RETAINING RING-CAMSHAFT	2
2 WASHER-CAM HEAD	2
3 WASHER-CAMSHAFT (1.88 X 1.26 X .06)	2
4 WASHER-CAMSHAFT (2.38 X 1.53 X .13)	2
5 SEAL-CAMSHAFT	4
6 BUSHING-CAMSHAFT	4
7 ROLLER-CAM	4

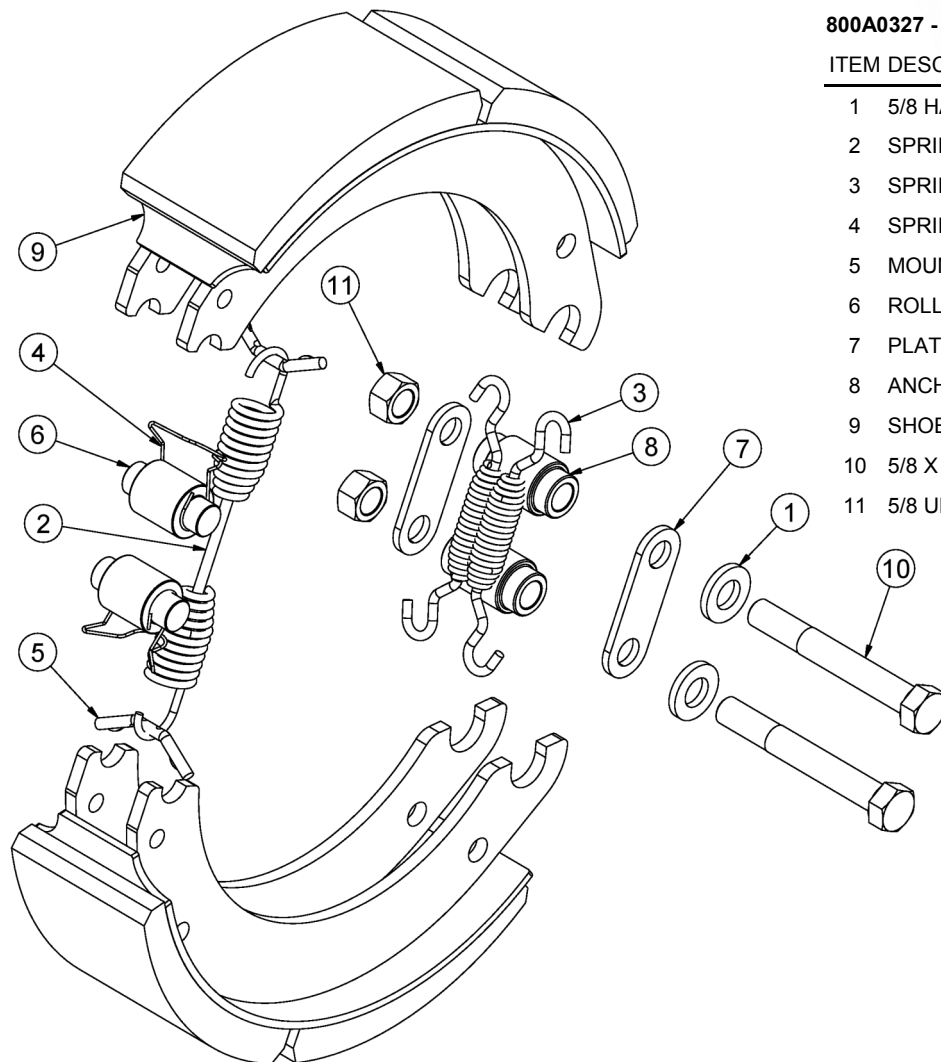

800A0327 - BRAKE SERVICE KIT


ITEM DESCRIPTION	QTY
1 5/8 HARDENED WASHER, ZINC PLATED	2
2 SPRING-RETURN, SHOE	1
3 SPRING-RETAINER, SHOE	2
4 SPRING RETAINER-CAM	2
5 MOUNT BAR-SPRING	2
6 ROLLER-CAM	2
7 PLATE-ANCHOR	2
8 ANCHOR-BRAKE SHOE	2
9 SHOE-BRAKE, 15 X 4 Q PLUS	2
10 5/8 X 4 3/4 UNF HEX CAP SCR (GR 8) O&P	2
11 5/8 UNF HEX TOP LOCK NUT (GR C) O&P	2

Service Kits

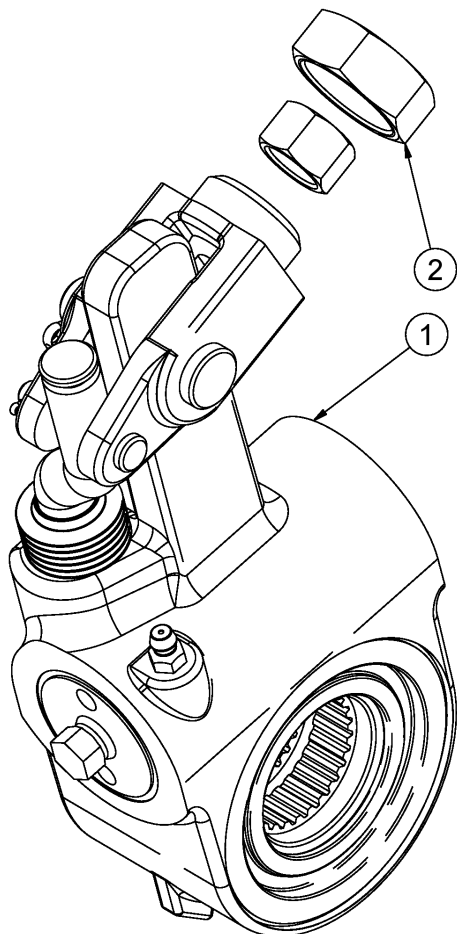


800A0328 - SLACK ADJUSTER SERVICE KIT

ITEM DESCRIPTION	QTY
1 SLACK ADJUSTER - 5.50	1
2 KIT-CONNECTING, SLACK ADJUSTER	1

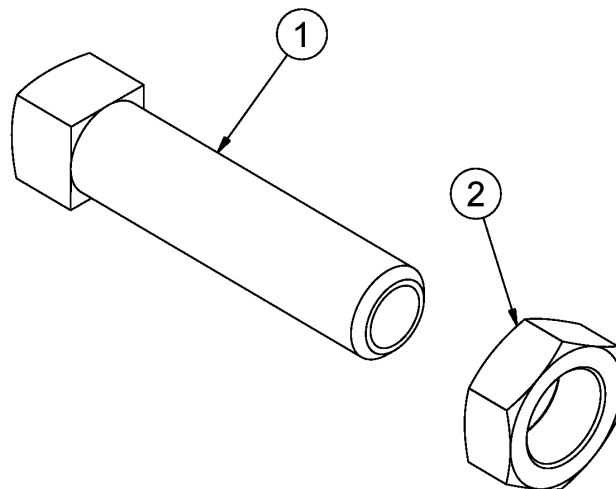

800A0329 - STEERING STOP BOLT SERVICE KIT

ITEM DESCRIPTION	QTY
1 BOLT-STOP, STEERING	1
2 5/8 UNC HEX JAM NUT	1

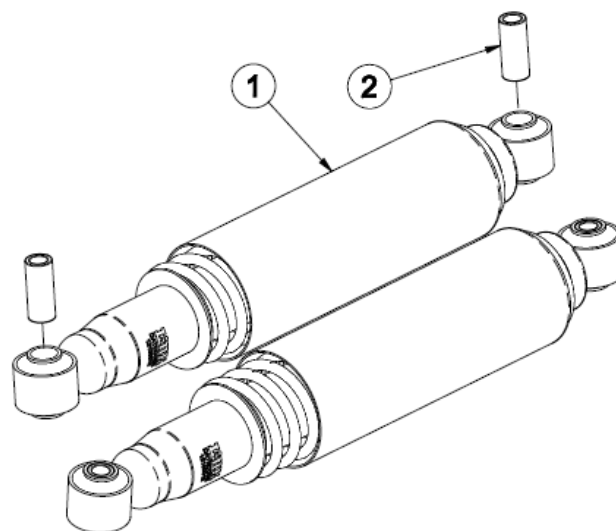

12100015 - STEERING STABILIZER KIT

ITEM DESCRIPTION	QTY
1 SHOCK ABSORBER, WIDE BODY	2
2 BUSHING-SHOCK, ACETAL	4



LINK MANUFACTURING, LTD.
223 15TH ST. NE
SIOUX CENTER, IA 51250
1-800-222-6283
www.linkmfg.com